

HELIDECK LANDING NET // 14x14m octagon

PRODUCT NAME

Frictape Landing Deck Net

PRODUCT NO.

7003-126

APPLICATION

To be used on helideck to create friction between helicopter wheels and deck surface.

TYPE APPROVALS

DNV S-7903
ABS 13-LD1012205A-PDA

NET PROPERTIES

- >> Anti-skid material and anti-skid mesh structure
- >> Mesh size 20x20 cm
- >> Net height from surface less than 2 cm when stepped on
- >> Electrostatically safe, non-flammable

COMPLY WITH:

- >> CAP 437 (February 2013)
- >> ICAO Heliport manual, Third Edition, 9261-AN/903
- >> NORMAM01/DPC Capitulo 6
- >> DNV-OS-E401 Helicopter decks
- >> ABS Rules for Mobile Offshore Drilling Units 2012 Part 5
- >> USCG 46 CFR, Part 108.235

MATERIAL PROPERTIES

- >> Weather resistant UV-protected polyester and jute yarn tape construction
- >> Material 2-layer woven lightweight tape of:
 - > Tape dimensions: 38x5 mm (width/thickness)
 - > Weight: 80 g/m
 - > Tensile strength: 20 kN

MEASUREMENTS



- >> Frictape Tiedown tapes, 32pcs

Dry weights:

- >> Textile parts (net + 7 m tiedowns + carrying bag): 180kg
- >> Gross with packing included: 230kg
- >> Optional ratchet assemblies add weight to gross 35kg
- >> Shipment on 100x120x106 cm plywood pallet, ISPM 15 certified

One Unit consists of:

- >> Actual net
- >> 32pcs of Frictape compatible 7 m long, 3 ton/35 mm wide tiedown tapes readily attached to the net perimeter as indicated in drawing
- >> Documentation included:
 - > DNV S-7903 Type Approval Certificate
 - > ABS 13-LD1012205A-PDA Type Approval Certificate
 - > Handbook in English
 - > Delivery Technical Certificate
 - > Certificate of origin and other additional materials on request against possible additional cost.
- >> Packed into a textile carrying bag with carrying loops
- >> Fastening ratchets are delivered as options if ordered

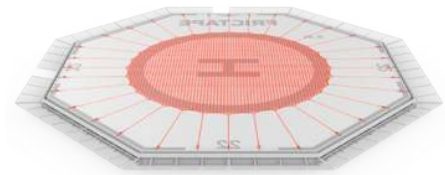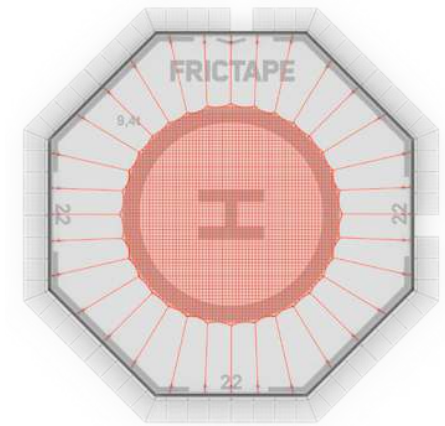

LIMITATIONS

- >> Use as directed by local aviation authorities
- >> Visual inspections on the net and attachments before use

AGE

- >> 5 years from date of installation unless the rejection criteria (below) is met before

REJECTION CRITERIA

- >> When visually broken (cuts, breaks etc.) or
- >> Approximately 10% of the black polyester material is visually worn

REJECTION METHOD

- >> Markings on the net to be removed and the net to be discarded



FRICTAPE

HELIDECK LANDING NET // Accessories

WRENCH

Wrench operated stainless steel ratchet with 2T hot dip galvanized shackle

Product no. 7005-103 SS



WRENCH

Wrench operated ratchet with 1T hook, both Stainless steel

Product no. 7005-105 SS



HANDLE

Handle operated stainless steel ratchet with 2T hot dip galvanized shackle

Product no. 7005-104 SS



HANDLE

Handle operated ratchet with 1T hook, both Stainless steel

Product no. 7005-106 SS



FRICTAPE TIEDOWN TAPES

Are attached to Frictape landing net with a lasso loop at 1,5m intervals. Standard length supplied with the net is 7 m ' (Product no 7005-101) including sewn loop at other end.

Other options available on request:

For example longer 9 m option (Product no 7005-102).



PACKING

Ratchet assemblies are packed in carrying bag(s) depending on ordered numbers. Wrench operated ratchets include also 28 mm wrench for tensioning.




DELIVERY

Delivery in a plywood pallet if ordered individually.

When delivered with a Frictape Landing Net only bags are used.



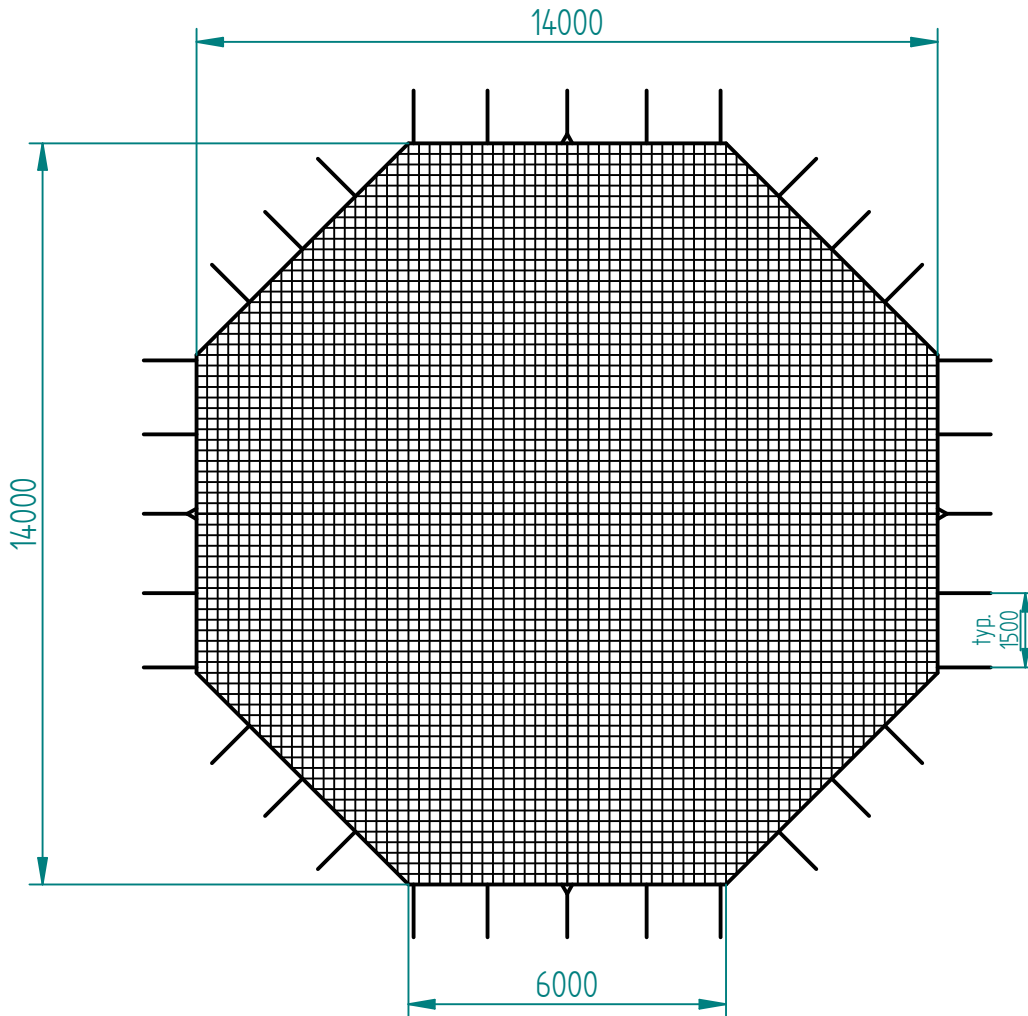

TITLE

14m x 14m Octagon Landing Net

DWG NO

7003-126

ALL RIGHTS RESERVED



Để biết giá cả hoặc thêm thông tin, vui lòng liên hệ với AZMarine theo thông tin chi tiết bên dưới

AZMARINE - MARINE SAFETY EQUIPMENT

Tel: +84 938 697 839

Email: sales@azmarine.vn

Website: www.azmarine.vn

[Brands](#)

[Thiết bị cứu sinh](#)

[Thiết bị liên lạc hàng hải](#)

[Thiết bị dầu khí](#)



AZMarine Nhà phân phối thiết bị an toàn hàng hải uy tín nhất Việt Nam